

TOSHIBA Transistor Silicon NPN Epitaxial Planar Type (PCT process)


2SC2668

High Frequency Amplifier Applications
 FM, RF, IF Amplifier Applications

- Small reverse transfer capacitance: $C_{re} = 0.70$ pF (typ.)
- Low noise figure: NF = 2.5dB (typ.)

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	40	V
Collector-emitter voltage	V_{CEO}	30	V
Emitter-base voltage	V_{EBO}	4	V
Collector current	I_C	20	mA
Emitter current	I_B	4	mA
Collector power dissipation	P_C	100	mW
Junction temperature range	T_j	125	°C
Storage temperature range	T_{stg}	-55~125	°C

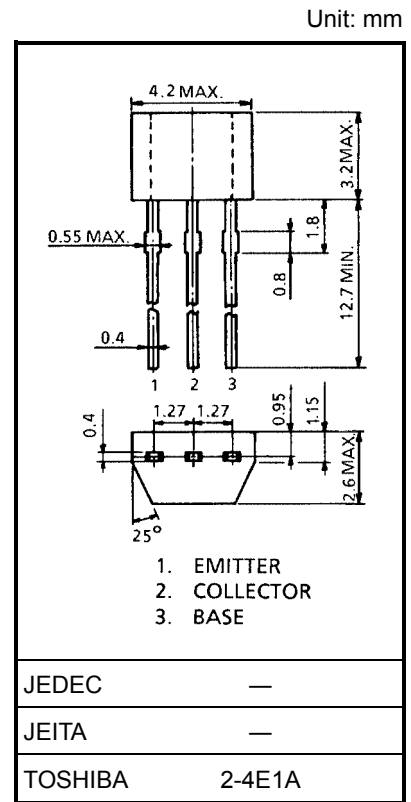


Weight: 0.13 g (typ.)

Electrical Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	I_{CBO}	$V_{CB} = 40$ V, $I_E = 0$	—	—	0.5	μ A
Emitter cut-off current	I_{EBO}	$V_{EB} = 4$ V, $I_C = 0$	—	—	0.5	μ A
DC current gain	h_{FE} (Note)	$V_{CE} = 6$ V, $I_C = 1$ mA	40	—	200	
Reverse transfer capacitance	C_{re}	$V_{CE} = 6$ V, $f = 1$ MHz	—	0.70	—	pF
Transition frequency	f_T	$V_{CE} = 6$ V, $I_C = 1$ mA	—	550	—	MHz
Collector-base time constant	$C_c \cdot r_{bb'}$	$V_{CE} = 6$ V, $I_E = -1$ mA, $f = 30$ MHz	—	—	30	ps
Noise figure	NF	$V_{CC} = 6$ V, $I_E = -1$ mA, $f = 100$ MHz, (Figure 1)	—	2.5	5.0	dB
Power gain	G_{pe}		—	18	—	dB

Note: h_{FE} classification R: 40~80 O: 70~140 Y: 100~200

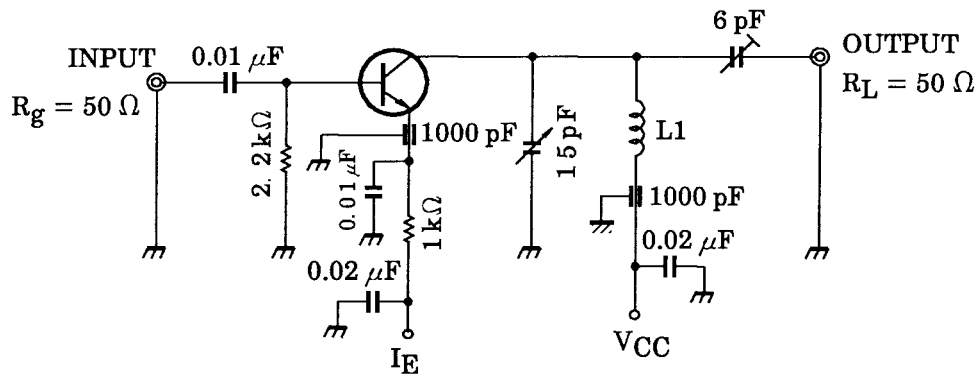

L₁: 0.8 mmφ silver plated copper wire, 4 turns. 10 mm ID, 8 mm length.

Figure 1 NF, G_{pe} Test Circuit






Y Parameter (typ.)







- (1) Common emitter (V_{CE} = 6 V, I_E = -1 mA, f = 100 MHz)







Characteristics	Symbol	Typ.	Unit
Input conductance	g _{ie}	2.9	ms
Input capacitance	C _{ie}	10.2	pF
Reverse transfer admittance	Y _{re}	0.33	ms
Phase angle of reverse transfer admittance	θ _{re}	-90	°
Forward transfer admittance	Y _{fe}	40	ms
Phase angle of forward transfer admittance	θ _{fe}	-20	°
Output conductance	g _{oe}	45	μs
Output capacitance	C _{oe}	1.1	pF







- (2) Common base (V_{CB} = 6 V, I_E = -1 mA, f = 100 MHz)

Characteristics	Symbol	Typ.	Unit
Input conductance	g _{ib}	34	ms
Input capacitance	C _{ib}	-10	pF
Reverse transfer admittance	Y _{rb}	0.27	ms
Phase angle of reverse transfer admittance	θ _{rb}	-105	°
Forward transfer admittance	Y _{fb}	34	ms
Phase angle of forward transfer admittance	θ _{fb}	165	°
Output conductance	g _{ob}	45	μs
Output capacitance	C _{ob}	1.1	pF

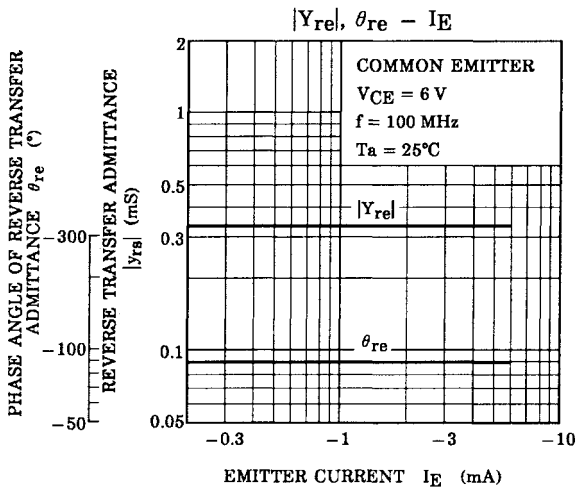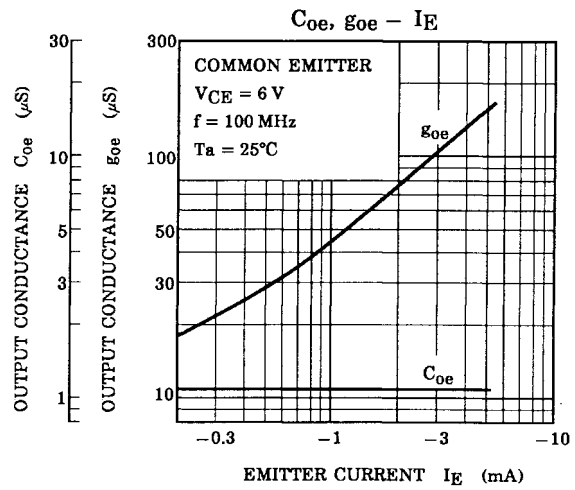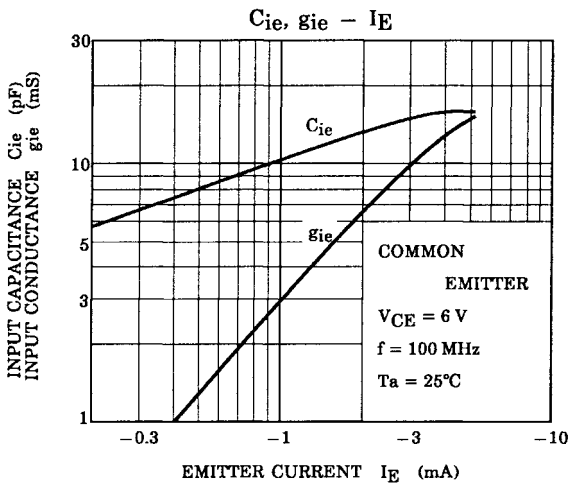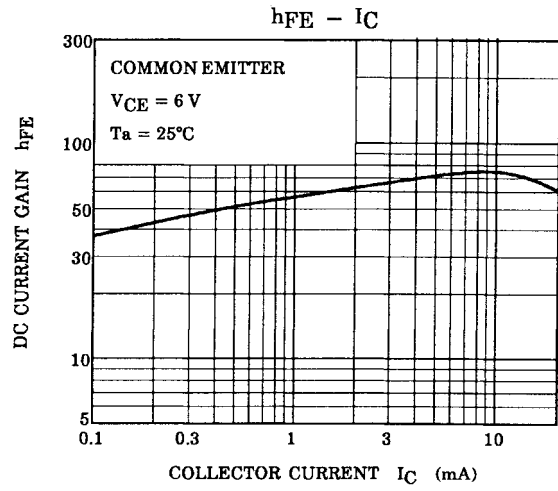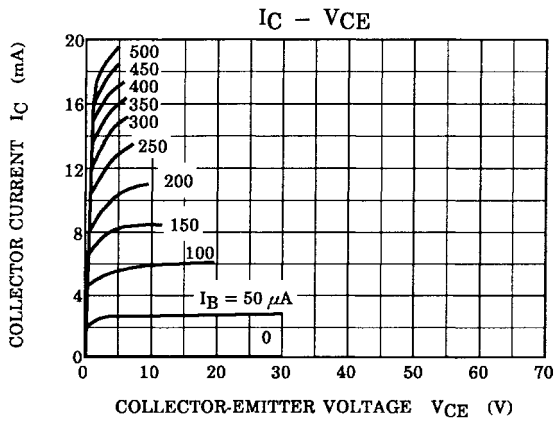

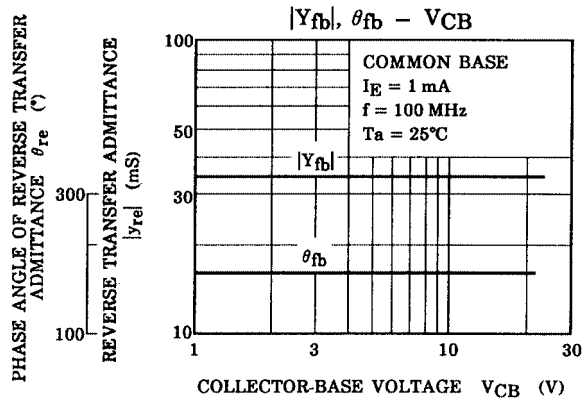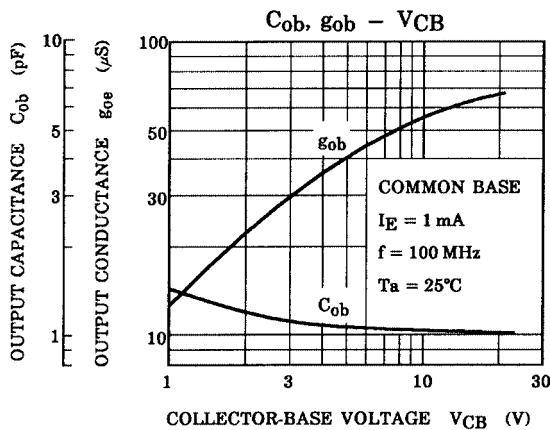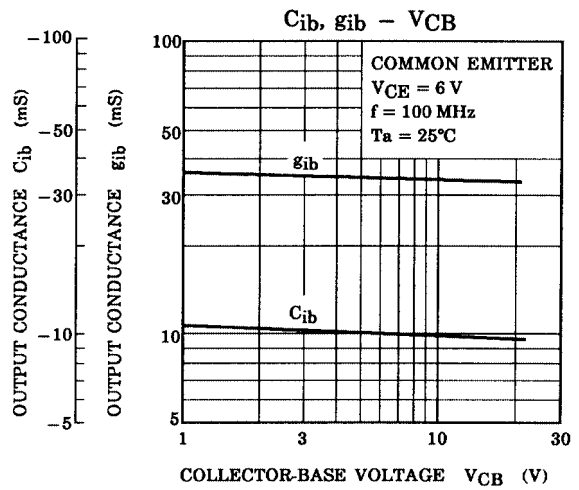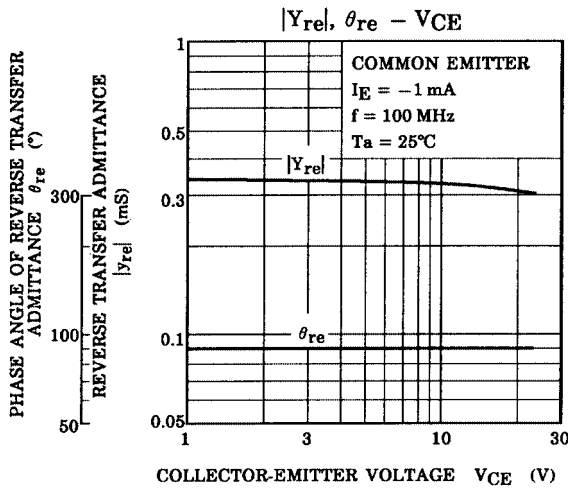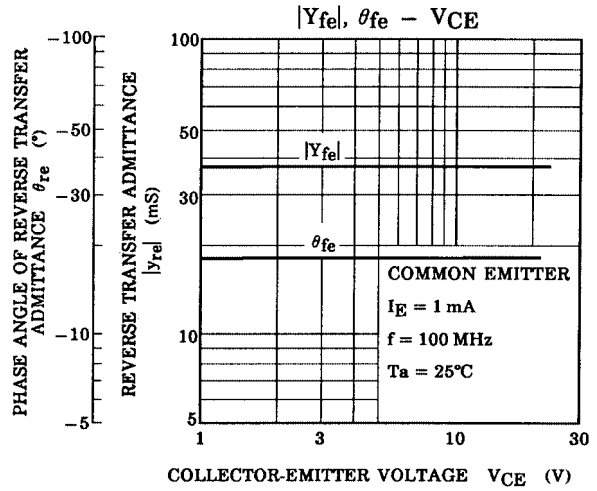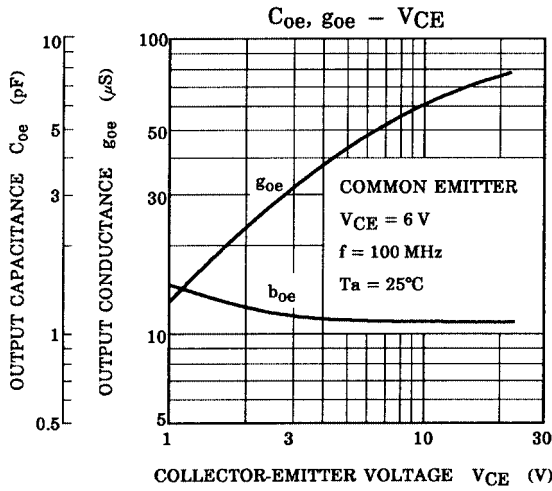

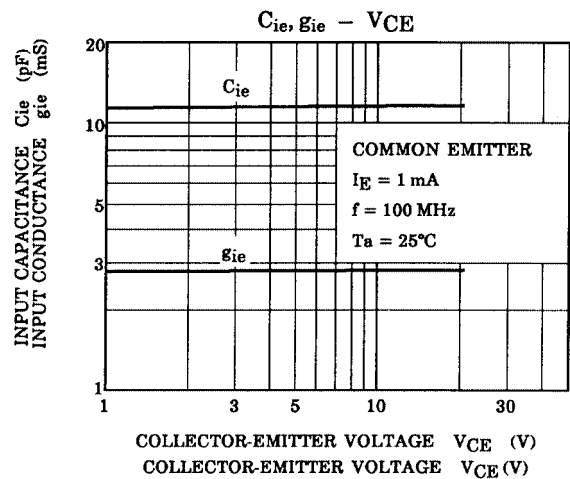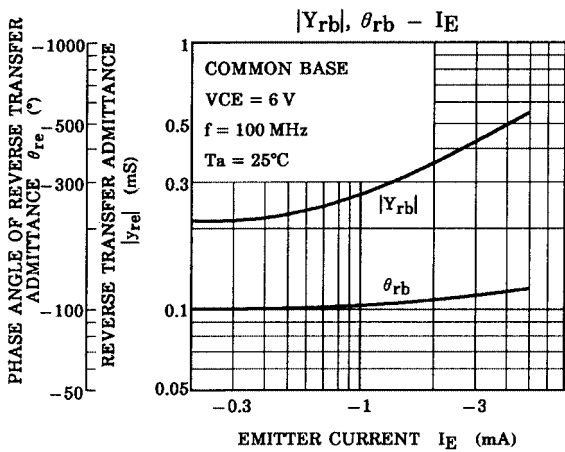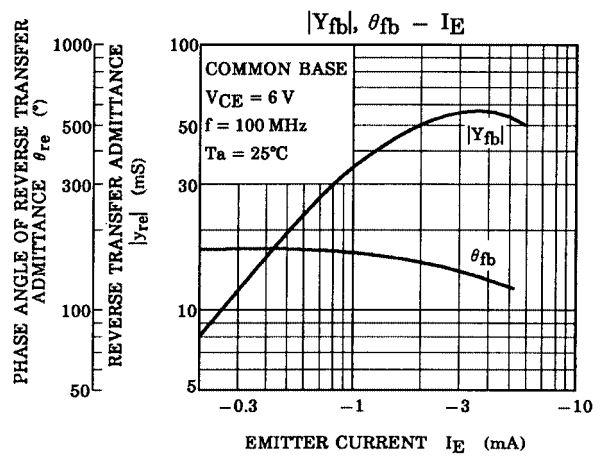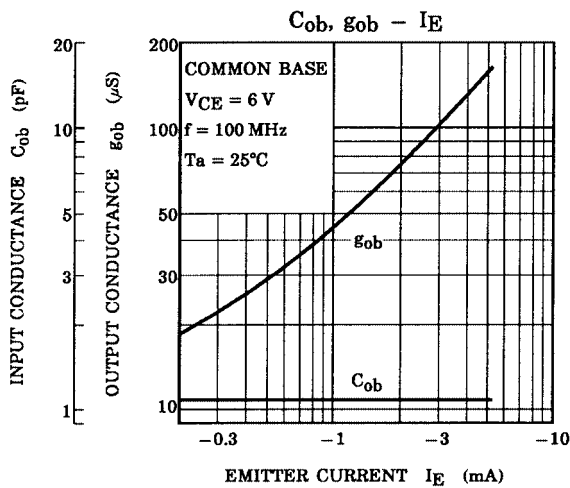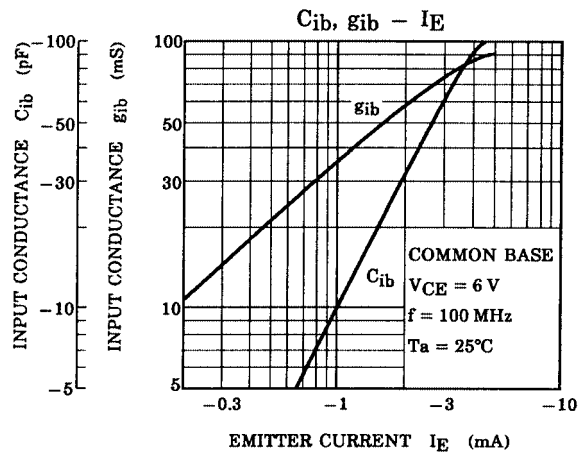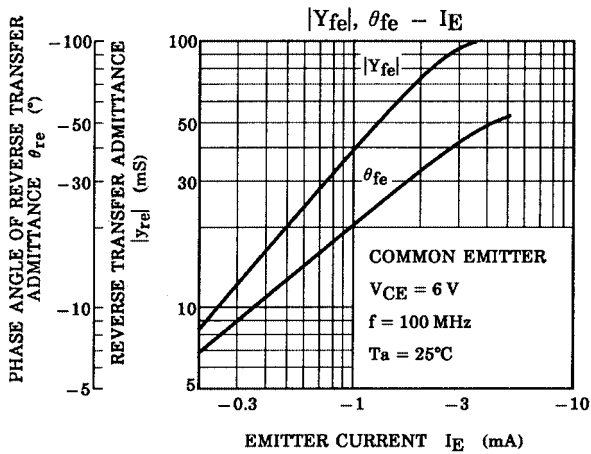

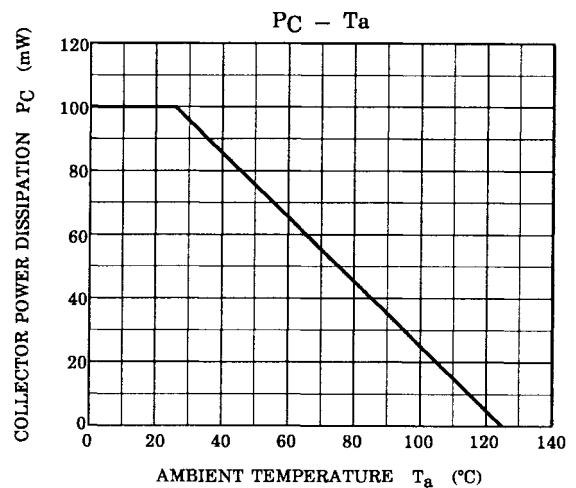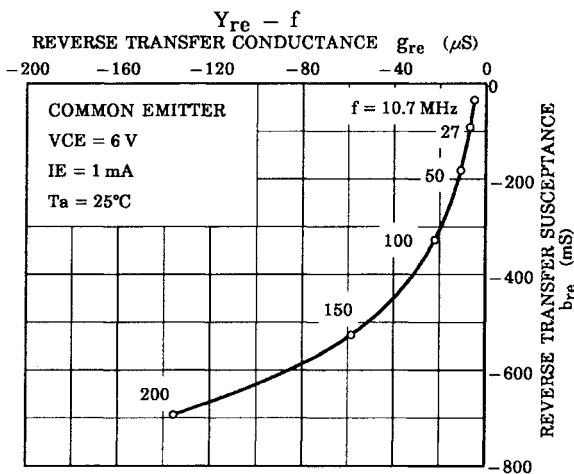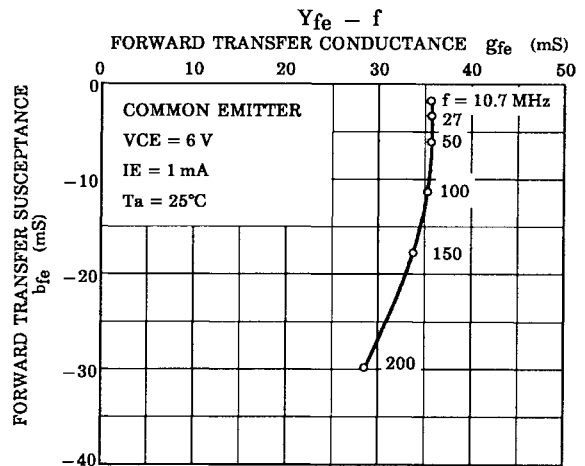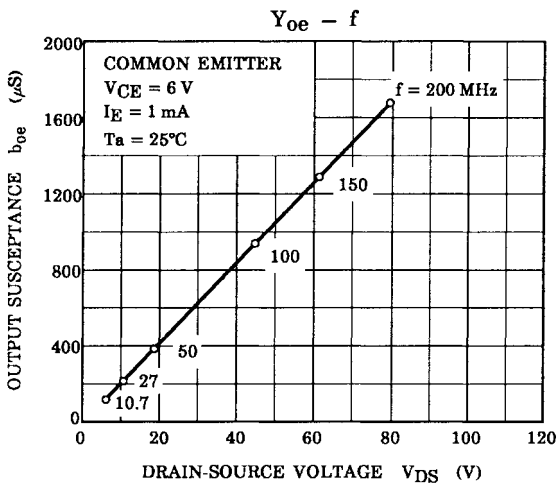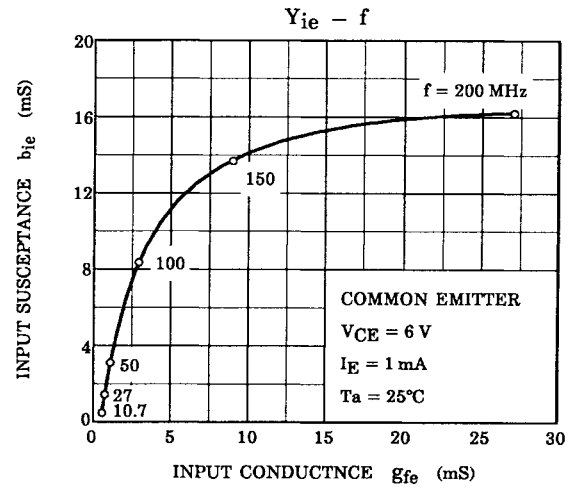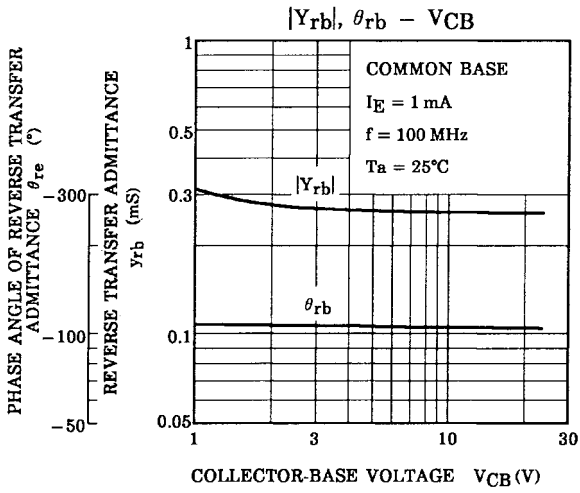

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.